

形 ギヤードモータ 外形寸法図 (ユニットサイズ E6~E21)

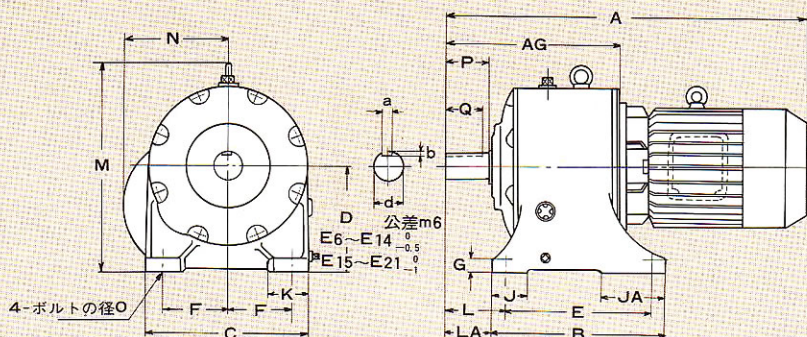


図18

表18 寸法表

減速比	kW		ユニット サイズ	モータ ワット																	軸 端					重量 (約 kg)
	4P	6P			A	AG	B	C	D	E	F	G	J	JA	K	L	LA	M	N	O	d	a	b	P	Q	
1/5 をこえ	0.4	—	E6S	71	435	219	210	200	125	170	75	20	50	85	45	80	60	260	115	M10	28	7	4	56	50.5	34
	0.75	0.4	E6	80	466	225	210	200	125	170	75	20	50	85	45	80	60	260	115	M10	28	7	4	56	50.5	37
	1.5	0.75	E7	90L	524	237	230	230	132	190	85	22	60	90	55	75	55	285	130	M12	31.5	10	4.5	56	50	52
	2.2	1.5	E9	100L	585	273	255	250	160	205	90	25	65	90	65	95	70	330	155	M12	40	10	4.5	71	65	67
	3.7	2.2	E10	112M	633	298	275	290	180	215	110	30	70	100	65	110	80	370	170	M16	45	12	4.5	80	73	93
1/10 まで	5.5	3.7	E11	132S	702	328	310	300	200	250	110	30	70	120	75	120	90	405	185	M16	50	12	4.5	90	81	125
	7.5	5.5	E12	132M	771	359	340	350	212	280	130	35	80	130	85	130	100	445	210	M20	56	15	5	100	92.5	155
	11	7.5	E14	160M	883	397	370	395	250	310	150	40	80	140	90	140	110	505	245	M20	63	18	6	112	104	230
	15	11	E15	160L	965	435	415	420	280	345	160	40	105	150	90	150	115	555	270	M20	71	20	7	112	105	290
	22	15	E17	180L	1105	505	490	455	300	410	175	45	110	180	105	170	130	595	295	M24	80	20	7	125	118	433
1/10 をこえ	30	22	E18	200L	1196	546	540	510	335	460	200	45	115	200	110	185	145	650	316	M24	90	24	8	140	132	568
	37	—	E21	225S	1255	588	590	570	375	500	225	50	125	210	120	190	145	740	365	M24	100	28	9	140	134	738
	45	30	E21	225M	1280	588	590	570	375	500	225	50	125	210	120	190	145	740	365	M24	100	28	9	140	134	738
	0.4	—	E6	71	435	219	210	200	125	170	75	20	50	85	45	80	60	260	115	M10	28	7	4	56	50.5	34
	0.75	0.4	E7	80	478	237	230	230	132	190	85	22	60	90	55	75	55	285	130	M12	31.5	10	4.5	56	50	43
1/20 まで	1.5	0.75	E9	90L	556	269	255	250	160	205	90	25	65	90	65	95	70	330	155	M12	40	10	4.5	71	65	60
	2.2	1.5	E10	100L	610	298	275	290	180	215	110	30	70	100	65	110	80	370	170	M16	45	12	4.5	80	73	80
	3.7	2.2	E11	112M	659	324	310	300	200	250	110	30	70	120	75	120	90	405	185	M16	50	12	4.5	90	81	105
	5.5	3.7	E12	132S	733	359	340	350	212	280	130	35	80	130	85	130	100	445	210	M20	56	15	5	100	92.5	145
	7.5	5.5	E14	132M	803	391	370	395	250	310	150	40	80	140	90	140	110	505	245	M20	63	18	6	112	104	190
1/20 をこえ	11	7.5	E15	160M	921	435	415	420	280	345	160	40	105	150	90	150	115	555	270	M20	71	20	7	112	105	270
	15	11	E17	160L	1031	501	490	455	300	410	175	45	110	180	105	170	130	595	295	M24	80	20	7	125	118	341
	22	15	E18	180L	1146	546	540	510	335	460	200	45	115	200	110	185	145	650	316	M24	90	24	8	140	132	495
	30	22	E21	200L	1238	588	590	570	375	500	225	50	125	210	120	190	145	740	365	M24	100	28	9	140	134	678
	0.4	—	E7	71	447	231	230	230	132	190	85	22	60	90	55	75	55	285	130	M12	31.5	10	4.5	56	50	40
1/30 まで	0.75	0.4	E9	80	510	269	255	250	160	205	90	25	65	90	65	95	70	330	155	M12	40	10	4.5	71	65	51
	1.5	0.75	E10	90L	581	294	275	290	180	215	110	30	70	100	65	110	80	370	170	M16	45	12	4.5	80	73	73
	2.2	1.5	E11	100L	636	324	310	300	200	250	110	30	70	120	75	120	90	405	185	M16	50	12	4.5	90	81	92
	3.7	2.2	E12	112M	690	355	340	350	212	280	130	35	80	130	85	130	100	445	210	M20	56	15	5	100	92.5	125
	5.5	3.7	E14	132S	765	391	370	395	250	310	150	40	80	140	90	140	110	505	245	M20	63	18	6	112	104	180
1/30 をこえ	7.5	5.5	E15	132M	841	429	415	420	280	345	160	40	105	150	90	150	115	555	270	M20	71	20	7	112	105	230
	11	7.5	E17	160M	987	501	490	455	300	410	175	45	110	180	105	170	130	595	295	M24	80	20	7	125	118	321
	15	11	E18	160L	1072	542	540	510	335	460	200	45	115	200	110	185	145	650	316	M24	90	24	8	140	132	403
	22	15	E21	180L	1188	588	590	570	375	500	225	50	125	210	120	190	145	740	365	M24	100	28	9	140	134	605
	30	22	E21	180L	1188	588	590	570	375	500	225	50	125	210	120	190	145	740	365	M24	100	28	9	140	134	605

(注) 全長Aは概略寸法を示します。